

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/001054

International filing date: 22 March 2005 (22.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0407642.8
Filing date: 02 April 2004 (02.04.2004)

Date of receipt at the International Bureau: 12 May 2005 (12.05.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



GB 05/1054



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 13 April 2005

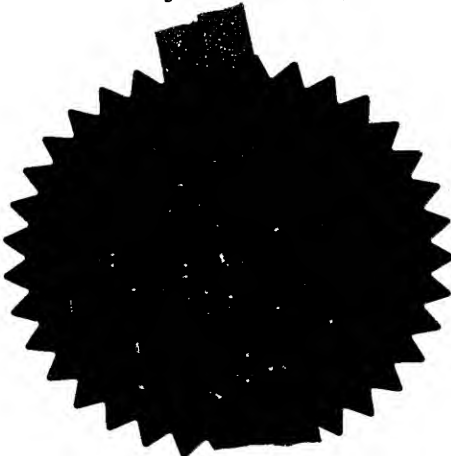

00100 00100 00100



00100

Patents Form 1/77

Patents Act 1977
(Rule 16)



The
Patent
Office

05APR04 085636 -2 000113
P01/7700 0.00-0407642.8 ACCOUNT CHA

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

88047/13321/03

2. Patent application number

(The Patent office will fill this part in)

0407642.8

- 2 APR 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

EASTMAN KODAK COMPANY
343 STATE STREET
ROCHESTER
NEW YORK 14650-2201
UNITED STATES OF AMERICA

Patents ADP number (if you know it)

423020001

If the applicant is a corporate body, give the country/state of its incorporation

NEW JERSEY

4. Title of the invention

DISPLAY ELEMENT

5. Name of your agent (if you have one)

B BARKER

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

KODAK LIMITED
PATENTS, W92-3A
HEADSTONE DRIVE
HARROW
MIDDLESEX HA1 4TY

Patents ADP number (if you know it)

1024001

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number
(if you know it)

Date of Filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)

Number of earlier UK application

Date of filing
(day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

Answer YES if:

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note (d))

Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention.
Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description 6

Claim(s) 2

Abstract 1

Drawing(s) 3

+352

10. If you are also filing any of the following, state how many against each item.

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patent Form 9/77)

Request for substantive examination (Patent Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

B Barker

Date 2 APRIL 2004

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

B BARKER

020 8424 5177

brenda.barker@kodak.com

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6), or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.



The
Patent
Office

05APR04 090636 -2 00113
P01/7700 0.00-0407642.8 ACCOUNT CHA

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

88047/13321/03

- 2 APR 2004

2. Patent application number

(The Patent office will fill this part in)

0407642.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

EASTMAN KODAK COMPANY
343 STATE STREET
ROCHESTER
NEW YORK 14650-2201
UNITED STATES OF AMERICA

Patents ADP number (if you know it)

423020001

If the applicant is a corporate body, give the country/state of its incorporation

NEW JERSEY

4. Title of the invention

DISPLAY ELEMENT

5. Name of your agent (if you have one)

B BARKER

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

KODAK LIMITED
PATENTS, W92-3A
HEADSTONE DRIVE
HARROW
MIDDLESEX HA1 4TY

1024001

Patents ADP number (if you know it)

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number
(if you know it)

Date of Filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)

Number of earlier UK application

Date of filing
(day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

YES

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note (d))

Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention.

Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description 6

Claim(s) 2

Abstract 1

Drawing(s) 3

X35N

10. If you are also filing any of the following, state how many against each item.

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patent Form 9/77)

Request for substantive examination (Patent Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

B Barker

Date 2 APRIL 2004

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

B BARKER

020 8424 5177

brenda.barker@kodak.com

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6), or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

Display Element

Field of the Invention

5 This invention relates to the field of display elements, in particular to the field of passive display elements.

Background of the Invention

Many companies are actively seeking to create a display element that is easily manufacturable. These display elements can be either active, i.e. emit light
10 such as LED, OLED, PLED, EL, or passive, i.e. affect the passage, reflection or refraction of light such as LCD, CLC, e-ink etc.. Some passive systems are bistable such they can be switched and remain switched after the power has been removed. Most configurations previously disclosed can be readily adapted to colour functionality.

15 Various electrowetting display elements are known in the prior art.

US6473492 discloses a fluid element device that rearranges fluid within a capillary tube. A voltage is used to move the fluid within the capillary to a desired level. US2002/0080920 discloses a filter device using an array of elements based upon US6473492 for use with X-ray imaging equipment.
20 US2003/0085850 discloses an electrostatic device that changes a meniscus shape such that the focal length of the device changes.

US6449081 describes a focussing element based on the electrowetting phenomenon. WO2/002099527 describes a display element with a defined prismatic structure that contains two immiscible fluids together with electrodes
25 such that the fluid can be rearranged with the cell.

Problem to be solved by the Invention

In display elements based on the rearrangement of liquid it is of benefit to ensure the liquid is captured by capillary forces. This is achieved by making the
30 elements small. Thus the existing art does not easily address the requirement for large pixel areas. Furthermore, the existing art describes structures that

necessarily require micro-fabrication and thus relatively complex construction methods.

It is the purpose of the current invention to provide a new device based on a combination of mechanisms that has previously not been contemplated. This class of device will be adaptable to colour though the description below is for a single colour element. The display element is capacitative in nature and thus has low power consumption and is switched by low voltages. The element modifies the reflectivity of the surface thereof.

Summary of the Invention

According to the present invention there is provided a display element comprising a single layer of porous material, a discrete drop of liquid and means for connecting a voltage supply to the layer, the layer comprising a plurality of conductive particles covered with a lyophobic and electrically insulating covering, whereby on application of a voltage between the liquid and the porous layer the drop of liquid moves into the layer, the drop moving back out of the layer upon removal of the voltage, the movement of the liquid effecting an optical change when viewed from above the porous layer.

The invention further provides a device comprising at least one element as described above including means for connection of each element to a circuit to create a matrix display.

Advantageous Effect of the Invention

The present invention is simple to manufacture over large areas because of the stochastic structure of the elements and may be manufactured in part via roll-to-roll techniques. It fulfils the requirement of capturing small liquid elements by capillarity. However the switching time of the element is not limited by its area. It is also simple to address and drive, via suitably patterned passive or active matrix type backplanes.

Brief Description of the Drawings

The invention will now be described with reference to the accompanying drawings in which:

Figure 1 is a schematic view of a single layered display element according to the invention;

5 Figure 2 shows the element both with and without voltage applied; and

Figure 3 is a schematic view of a further display element in accordance with the invention.

Detailed Description of the Invention

10 Figure 1 is a schematic view of a single layered display element 1 according to the invention. The invention relates to a passive display element.

Throughout the description and claims the term "upper" defines the side from which an element would be viewed. Use of the term "upper" is not to be taken as limiting the orientation of the element according to the invention.

15 The element is based on a single layer porous system. The element 1 comprises a lyophobic porous layer 8 on which is placed a drop of conductive liquid 2. Preferably the liquid is coloured. This includes the liquid being white. The liquid may be coloured by the addition of a dye or pigment. The conductive liquid may be created by adding ions to a solvent. Alternatively the conductive
20 liquid may be an ionic liquid.

An electrode 4 pins the drop of liquid in position on top of the lyophobic layer 8. Advantageously the liquid would have a contact angle with the electrode of less than 90°. A dielectric layer 10 is provided below the porous layer 8. A conductive layer 12 is provided below the dielectric layer 10. The electrode 4 and
25 the conductive layer 12 have means for connection with a voltage supply. The conductive layer 12 may comprise a wire grid. A transparent substrate 14 is located above the electrode 4 to encapsulate the drop of liquid. This is shown in Figure 2.

30 The porous layer 8 comprises particles 6 which have been deposited to form a porous network. The liquid has a contact angle greater than 90° with the particles 6. The particle sizes would be in the order of 30nm to 2 microns. The particles may be coloured or may be black. The particles 6 are conductive. The

particles may be solid metal particles or only the shell thereof may be conductive. If the particles have a shell the thickness of the shell can be chosen to create a particular coloured particle. An explanation of this can be found in Seed-mediated Growth Techniques for the Preparation of a Silver Nanoshell on a Silica Sphere, Zhong-jie Jiang and Chun-yan Liu, J. Phys. Chem B 2003, 107, 12411-12415.

Whichever type of particle is used they should be covered with a thin layer or covering 24 of a lyophobic material with low contact angle hysteresis and which is also electrically insulating. Suitable particles would be conductive silver particles encased with lyophobic and dielectric mercaptan. It will be understood by those skilled in the art that this is an example only and any conductive material and lyophobic, electrically insulating covering could be used within the terms of the invention. The layer of lyophobic material may be made of, for example, a polymer, a polyelectrolyte, a self assembled monolayer (SAM) or an inorganic shell.

The display element 1 uses electrostatics to drive the drop of liquid 2 into and out of the porous layer. With no voltage applied the drop of liquid 2 sits on top of the porous layer 8. The colour of the element then appears as the colour of the liquid.

When a voltage is applied between the liquid and the conductive layer 12 an effect called "electrowetting" takes effect. Electrowetting is explained in Blake et al, Langmuir 2000, 16, 2928-2935. The voltage applied is in the order of 1 volt, a maximum of 20V being envisaged.

The electrowetting effect reduces the contact angle of the liquid 2 with the porous layer 8. The usual electrowetting equation may be used

$$\cos(\theta) = \cos(\theta_0) + \frac{\epsilon \epsilon_0 V^2}{2d\gamma}$$

Where θ is the contact angle in the presence of a voltage, θ_0 is the contact angle with no voltage, V is the voltage, ϵ is the dielectric constant of the lyophobic layer, ϵ_0 is the permittivity of free space, γ is the liquid surface tension and d is the thickness of the lyophobic layer. The capillary pressure, ΔP , within the pore system can be defined as

$$\Delta P = \frac{\gamma \cos(\theta)}{a}$$

where a is the average pore radius within the porous structure.

With voltage applied the capillary pressure in the porous layer 8 is such that the drop of liquid 2 will be pulled into the layer 8. This can be seen in Figure 2. The colour of the element then appears as a mixture of the colour of the liquid 2 and the colour of the particles 6, the mixture depending on the porosity of the layer 8.

On removal of the voltage the contact angle of the liquid 2 with the porous layer increases again. The capillary pressure in the porous layer is then such that the liquid withdraws back out of the porous layer. The colour of the element then again appears as the colour of the liquid.

A further embodiment of the invention is shown in Figure 3. This embodiment provides a reflective or transparent membrane encapsulating the liquid. In all other respects it is similar to the embodiment shown in Figure 1.

The membrane 16 is formed of a flexible material. Possible materials include a very thin polymer or a very thin metal. However the invention is not to be taken as limited to these materials. The membrane could double as the electrode.

With no voltage applied to the electrode 4 the membrane, viewed from above, has a convex shape. Therefore what will be seen is a diffuse scattering of reflected or refracted light. When a voltage is applied the liquid 2 is pulled into porous layer 8 as described above. The membrane flexes and becomes concave when viewed from above. The light is more concentrated when reflected or refracted back from the concave surface of the membrane. Thus an optical change is seen when voltage is applied to the element 1.

On removal of the voltage the liquid 2 exits the porous layer 8 and the membrane 16 returns to its original convex shape.

The following working example demonstrates the principle of the invention.

A base electrode, lower conductor, was formed by an indium tin oxide (ITO) coating on a poly-ethylene-teraphthalate (PET) base. This was used as

supplied and cut into appropriately sized pieces. The ITO layer faced upwards and provided a conductive surface onto which the porous display device could be built.

5 The ITO base was dip coated (3-4 layers) with a fluoropolymer (Fluoropel 804A, sourced from Cytonix Corporation), which behaved as a hydrophobic dielectric layer. The thickness of the layer was approximately 3 μ m.

10 The porous layer contained 200nm diameter silver particles which were coated in a layer of octadecyl mercaptan. The silver particles were precipitated on the reduction of silver nitrate with sodium borohydride. The octadecyl mercaptan was added immediately after precipitation. The octadecyl mercaptan gave a hydrophobic and electrically insulating coating to the silver particles.

15 The resulting coating showed a step change in capacitance with voltage (at 2V AC peak-peak, 1kHz) when the capacitance was measured with a droplet of 20g/l NaCl solution placed on the surface. This indicated that the drop was being pulled reversibly in and out of the porous network. The drop of liquid switched into and out of the device at 2V peak to peak. The switch was reproducible and the same switch could be made several times with a single droplet.

20 A matrix or plurality of elements can be assembled to form a display device. In this respect a grid of electrodes could be provided onto which a plurality of individual drops of liquid could be placed. The individual electrodes can thus be addressed individually to switch individual display elements as pixels.

25 The invention has been described in detail with reference to preferred embodiments thereof. It will be understood by those skilled in the art that variations and modifications can be effected within the scope of the invention.

Claims:

1. A display element comprising a single layer of porous material, a discrete drop of liquid and means for connecting a voltage supply to the layer, the layer comprising a plurality of conductive particles covered with a lyophobic and electrically insulating covering, whereby on application of a voltage between the liquid and the porous layer the drop of liquid moves into the layer, the drop moving back out of the layer upon removal of the voltage, the movement of the liquid effecting an optical change when viewed from above the porous layer.
2. An element as claimed in claim 1 wherein the conductive particles are metallic.
3. An element as claimed in claim 1 wherein the conductive particles are organic or inorganic particles covered with a conductive shell.
4. An element as claimed in claim 3 wherein the thickness of the conductive shell is chosen to create a coloured particle.
5. An element as claimed in any preceding claim wherein the insulating covering is a polymer, a polyelectrolyte, a fluoropolymer, a self assembled monolayer (SAM) or an inorganic shell.
6. An element as claimed in claim 5 wherein the SAM comprises a molecule with a group that bonds to the conductive particles and a group that provides a high contact angle with the liquid.
7. An element as claimed in any preceding claim wherein the drop of liquid is encapsulated by a flexible membrane.
8. An element as claimed in claim 7 wherein the membrane is transparent.

9. An element as claimed in any preceding claim wherein the porous layer has a pore size greater than 30 nm and less than 2 μ m.

5 10. An element as claimed in any preceding claim wherein the conductive liquid is created by adding ions to a solvent.

11. An element as claimed in any of claims 1 to 9 wherein the conductive liquid is an ionic liquid.

10

12. An element as claimed in any preceding claim wherein the conductive liquid contains a dye or pigment to provide a coloured liquid.

13. A device comprising at least one element as claimed in any preceding claim including means for connection of each element to a circuit to create a matrix display.

15

14. A device comprising at least one element as claimed in any preceding claim, the materials of each layer being coated onto a support material.

20

15. A device as claimed in claim 14 wherein each element is environmentally sealed.

Abstract

Display Device

- 5 A display element comprising a single layer of porous material and a discrete drop of liquid. Application of a voltage between the liquid and the layer causes movement of the liquid and consequential optical changes to the element.



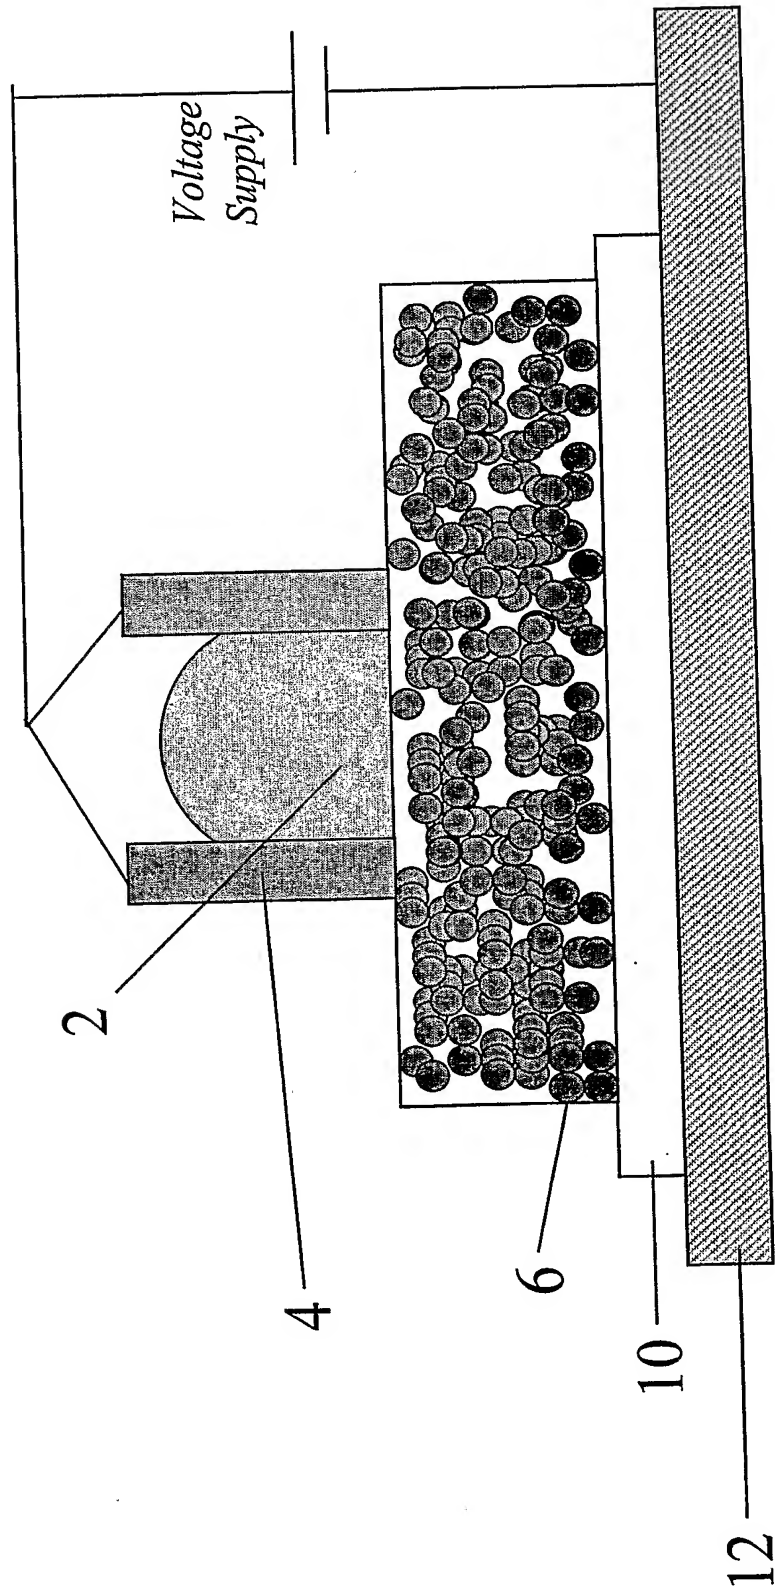


Fig. 1



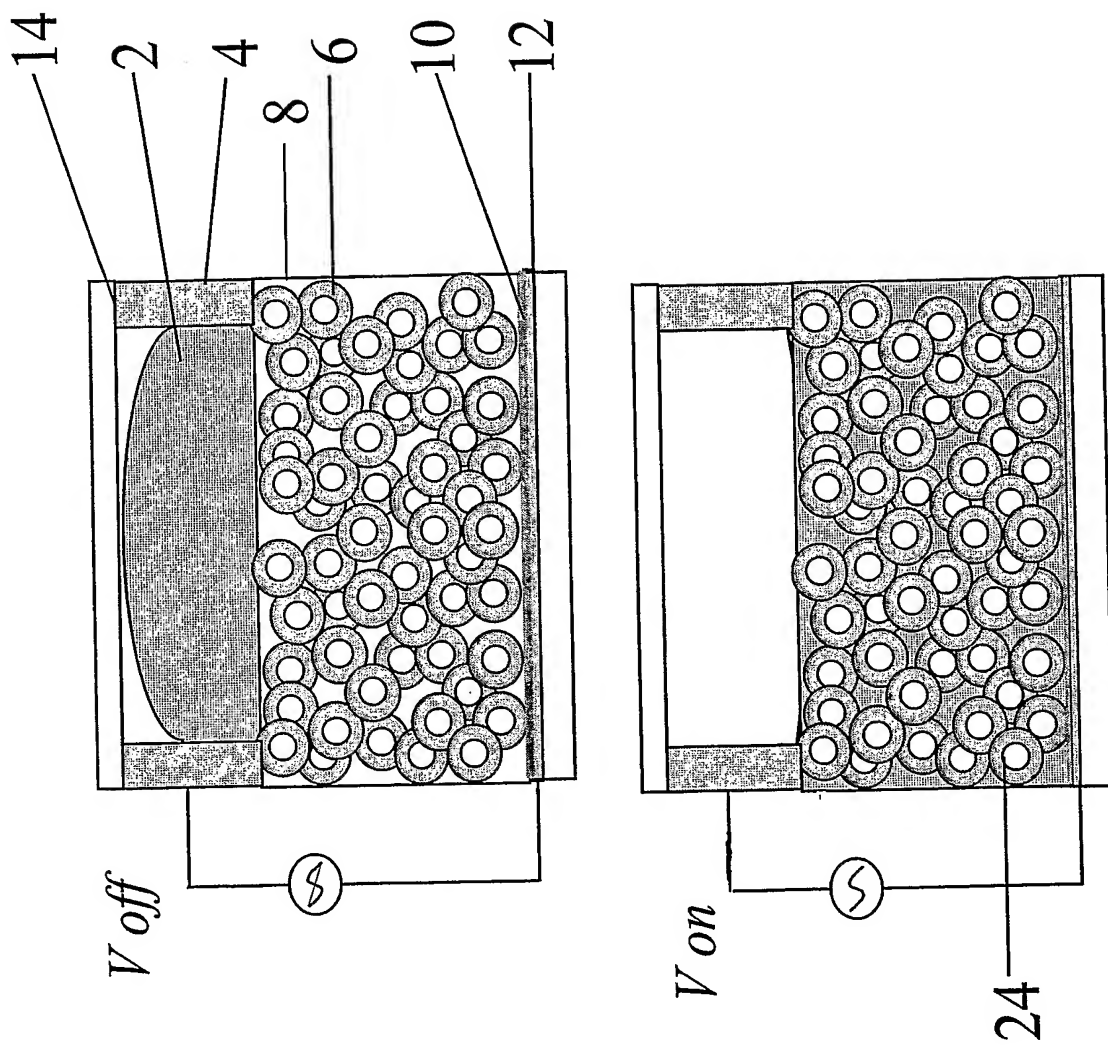


Fig. 2


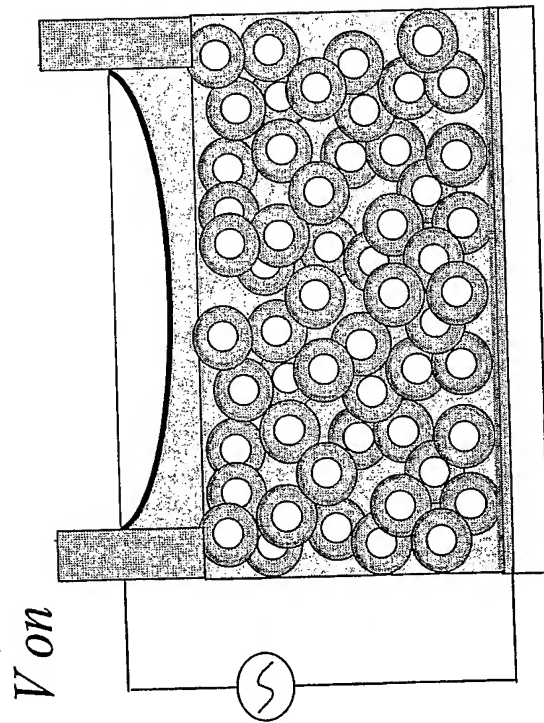


Fig. 3

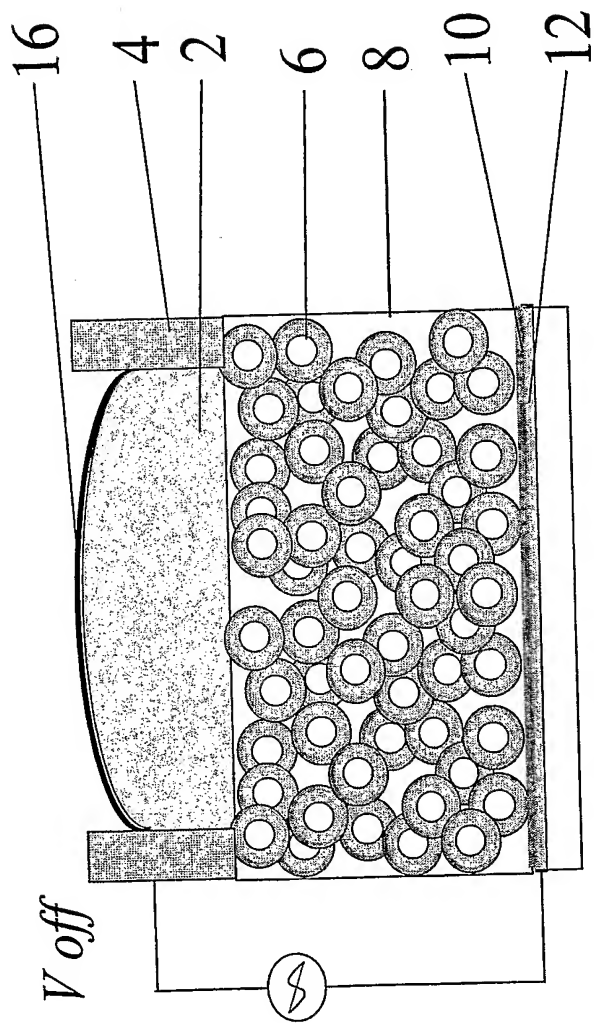